




POSITIONING LANYARD

Lanyard

The Chain Positioning Lanyard is specifically designed for working in suspension. Its two snap hook legs connect to the harness side D-rings, while the opposite end connects to the anchor point. Work Positioning allows the worker to be in suspension and work with both hands.

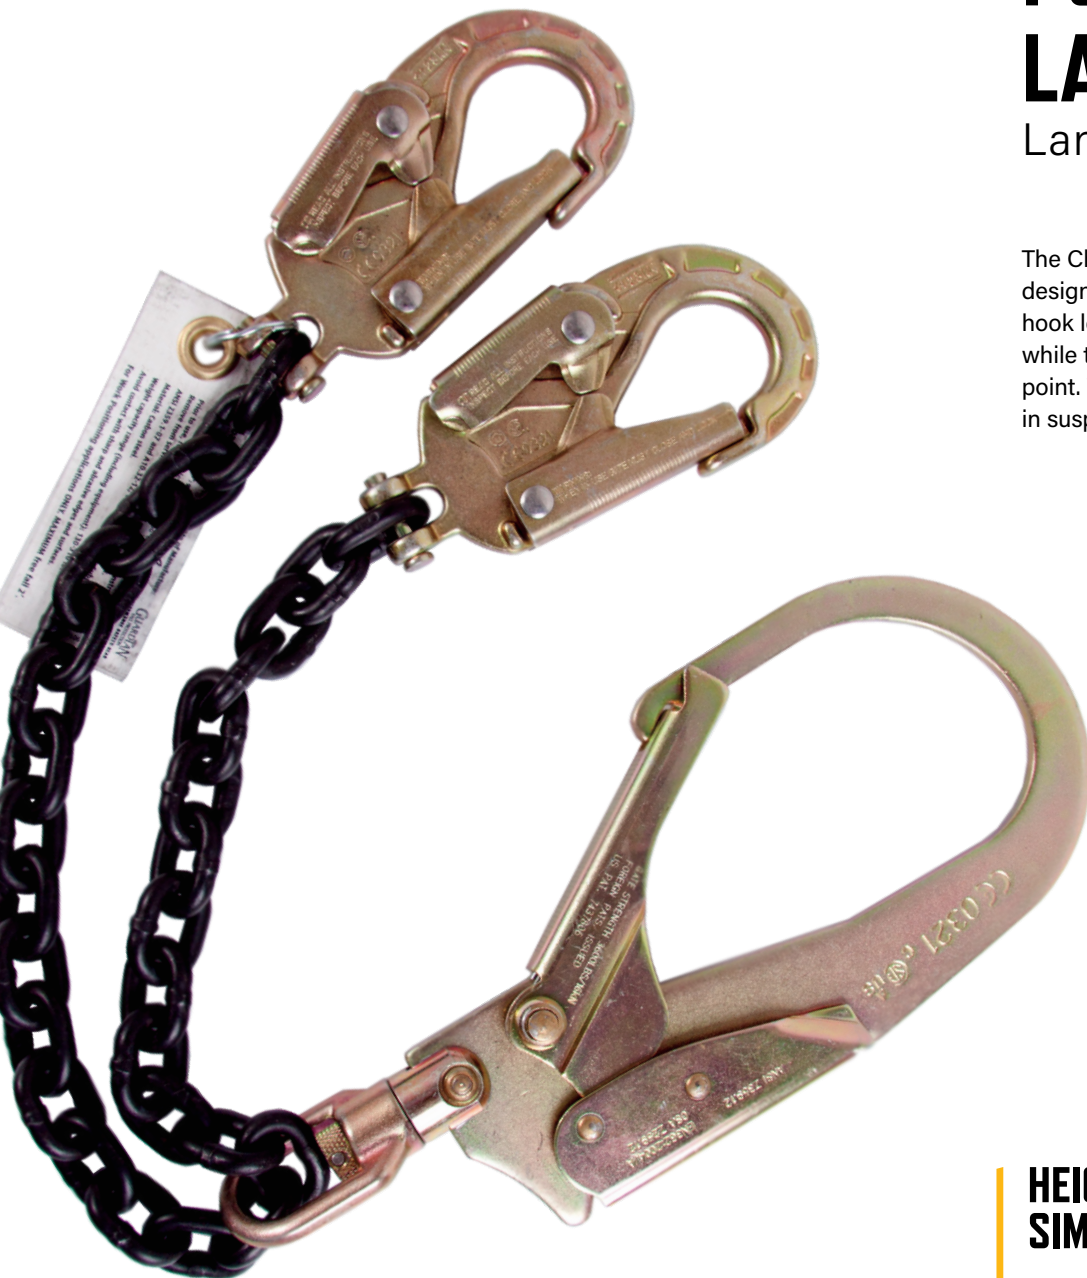

**HEIGHT SAFETY.
SIMPLIFIED.**

guardianfall.com



POSITIONING LANYARD

Lanyard



01608



01610

Key Features & Benefits

Dual 2' legs

Allows for hands-free positioning

Steel snap or steel rebar hooks

Galvanized steel hooks for strength and unparalleled durability

Specifications

User weight range | 130-310 lbs

Materials | Polyester, nylon, & galvanized steel

Hook Options



Steel snap hook



Steel rebar hook

Part numbers	Description	Leg	Hook type
01608	Chain positioning lanyard	Dual	Steel snap hooks
01610	Nylon webbing positioning lanyard	Dual	Steel rebar hooks
01616	Chain positioning lanyard w/swivel steel rebar hook	Dual	Steel clevis snap hooks
01616	Chain positioning lanyard w/non-swivel steel rebar hook	Dual	Steel clevis snap hooks

Declaration of conformity

This product has been tested in an ISO 17025 certified laboratory in accordance with all requirements specified by ANSI Z359.7-2019. All testing is validated by a third party professional engineer.

This product is compliant with the following safety regulations:
ANSI Z359.3-2017 | OSHA 1910.140 & 1926.502

For more information:

+1 (800) 466 6385

info@guardianfall.com



Designed, tested,
and assembled in
the **United States**